




Stalen kabelbinders

Materiaal : Roestvaststaal AISI 304 of AISI 316L
 Kleur : Staal
 Temperatuur bereik : -80 °C tot +538 °C
 Normering : UL

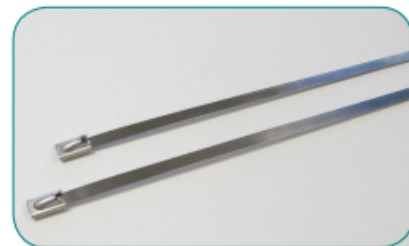

Typenr.	Lengte (mm)	Breedte (mm)	Max. bundel diameter (mm)	Trekracht (kg)	VPE (st.)
ST.STEEL 125x4,6mm	125	4,6	38,0	90	100
ST.STEEL 200x4,6mm	200	4,6	61,9	90	100
ST.STEEL 290x4,6mm	290	4,6	90,6	90	100
ST.STEEL 360x4,6mm	360	4,6	112,8	90	100
ST.STEEL 520x4,6mm	520	4,6	163,8	90	100
ST.STEEL 680x4,6mm	680	4,6	214,8	90	100
ST.STEEL 840x4,6mm	840	4,6	265,7	90	100
ST.STEEL 200x7,9mm	200	7,9	61,9	160	100
ST.STEEL 290x7,9mm	290	7,9	90,6	160	100
ST.STEEL 360x7,9mm	360	7,9	112,8	160	100
ST.STEEL 450x7,9mm	450	7,9	141,0	160	100
ST.STEEL 520x7,9mm	520	7,9	163,8	160	100
ST.STEEL 680x7,9mm	680	7,9	214,8	160	100
ST.STEEL 840x7,9mm	840	7,9	265,7	160	100
ST.STEEL 1020x7,9mm	1020	7,9	320,0	160	100

